


DOUBLE FREQUENCY METER 2FQ

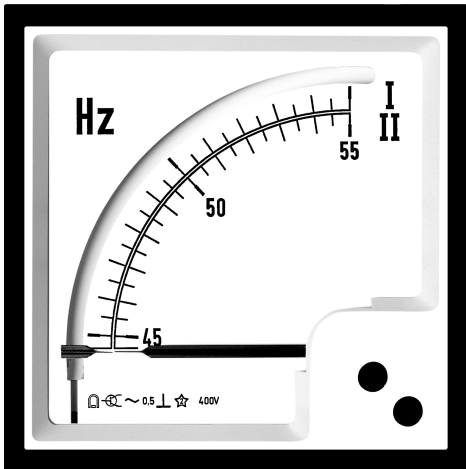

- Measuring of 2x frequency
- DIN size, 96x96
- Classe 0,5
- High immunity to 3rd harmonics

Application

The 2FQ is a measuring instrument for measuring frequency in 2 AC networks. Pointer frequency meter consisting of a moving coil instrument with built-in electronics for converting the frequency into an analog signal.

Measuring range

All sizes are available in the range:

Scale: 45-55Hz,
55-65Hz
45-65Hz
360-440Hz, andere auf Anfrage

Technical data

Scale: Exchangeable scale
(**Attention!!** disconnect supply before changing scale)


Measuring voltage: 100...110...220...230...240...380...
400...415...440... AC $\pm 15\%$
other on request

Consumption: 8...12mA

Accuracy: electronic, classe 0,5
movingcoil, classe 1,0
45-65Hz EN 60051 IEC 51

Housing: Plastic, self-extinguishing
(ULV94/V0)

Dimension

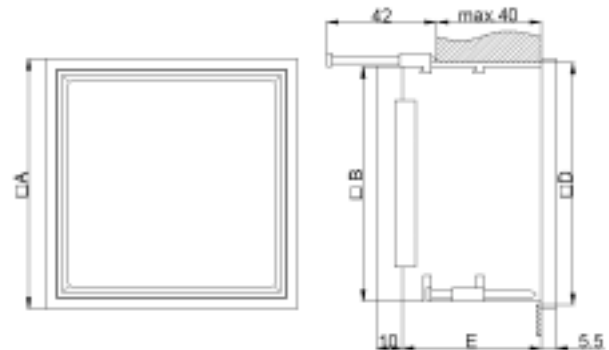

TYP	FQ 96
A Size	96x96
B Innenmaß	90x90
D cut put + Toleranz	92x92 0,8
E deep	118

Order specification

Typ, Size, range, Measuring voltage
2FQ 96, 2x45-55Hz, 230V